



RSM110-8-535M-560M_L



Celdas

110



Eficiencia

Hasta 21,4 %



Dimensiones del módulo

2384 X 1096 X 35 mm



Características del módulo

Marco de aluminio anodizado



Packaging

31 módulos por pallet,
620 módulos por 40'HC



Tecnología

P-Type



Garantía del producto

12 años de garantía




Garantía del rendimiento

25 años de garantía





HIGH PERFORMANCE MONOCRYSTALLINE PERC MODULE

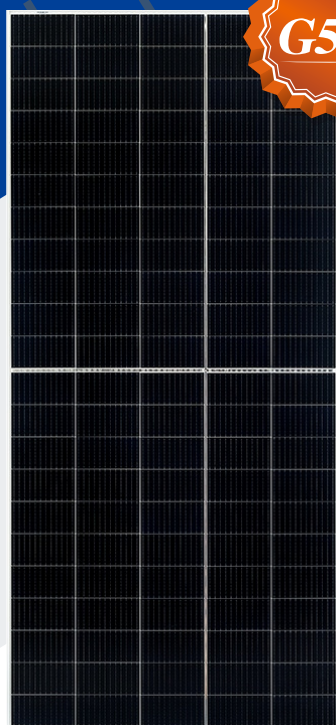

RSM110-8-535M-560M

110 CELL

Mono PERC Module

535-560Wp

Power Output Range

1500VDC

Maximum System Voltage

21.4%

Maximum Efficiency

KEY SALIENT FEATURES



Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing



Industry leading lowest thermal co-efficient of power



Industry leading 12 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive power tolerance of 0~+3%



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses



Excellent wind load 2400Pa & snow load 5400Pa under certain installation method



Comprehensive product and system certification

- ◆ IEC61215:2016; IEC61730-1/-2:2016;
- ◆ ISO 9001:2015 Quality Management System
- ◆ ISO 14001:2015 Environmental Management System
- ◆ ISO 45001:2018 Occupational Health and Safety Management System



★ As there are different certification requirements in different markets, please contact your local Risen Energy sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

RISEN ENERGY CO., LTD.

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.

Tashan Industry Zone, Meilin, Ninghai 315609, Ningbo | PRC


Tel: +86-574-59953239 Fax: +86-574-59953599

E-mail: marketing@risenenergy.com Website: www.risenenergy.com



LINEAR PERFORMANCE WARRANTY


12 year Product Warranty / 25 year Linear Power Warranty

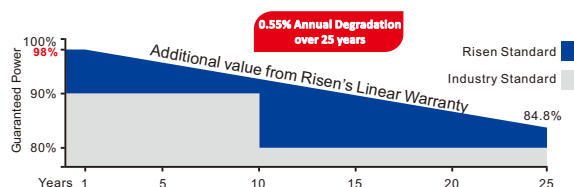

★ Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd

Dimensions of PV Module

Unit: mm

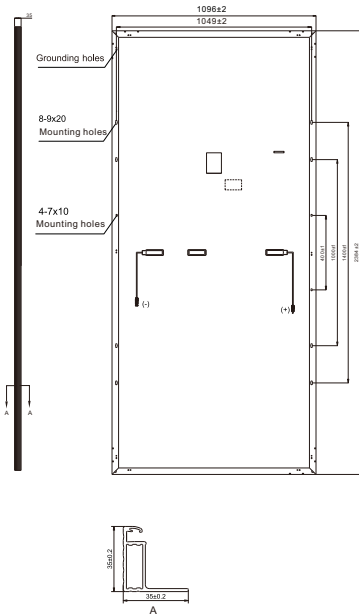

ELECTRICAL DATA (STC)

Model Number	RSM110-8-535M	RSM110-8-540M	RSM110-8-545M	RSM110-8-550M	RSM110-8-555M	RSM110-8-560M
Rated Power in Watts-P _{max} (W _p)	535	540	545	550	555	560
Open Circuit Voltage-V _{oc} (V)	37.58	37.78	38.02	38.24	38.46	38.68
Short Circuit Current-I _{sc} (A)	18.13	18.18	18.23	18.28	18.33	18.38
Maximum Power Voltage-V _{mpp} (V)	31.26	31.46	31.66	31.86	32.06	32.26
Maximum Power Current-I _{mpp} (A)	17.12	17.17	17.22	17.27	17.32	17.37
Module Efficiency (%) ★	20.5	20.7	20.9	21.0	21.2	21.4

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

★ Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

Model Number	RSM110-8-535M	RSM110-8-540M	RSM110-8-545M	RSM110-8-550M	RSM110-8-555M	RSM110-8-560M
Maximum Power-P _{max} (W _p)	405.3	409.0	412.8	416.7	420.5	424.3
Open Circuit Voltage-V _{oc} (V)	34.95	35.14	35.36	35.56	35.77	35.97
Short Circuit Current-I _{sc} (A)	14.87	14.91	14.95	14.99	15.03	15.07
Maximum Power Voltage-V _{mpp} (V)	29.01	29.19	29.38	29.57	29.75	29.94
Maximum Power Current-I _{mpp} (A)	13.97	14.01	14.05	14.09	14.13	14.17

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline
Cell configuration	110 cells (5×11+5×11)
Module dimensions	2384×1096×35mm
Weight	29kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² , Positive(+)350mm, Negative(-)230mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of V _{oc}	-0.25%/°C
Temperature Coefficient of I _{sc}	0.04%/°C
Temperature Coefficient of P _{max}	-0.34%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

PACKAGING CONFIGURATION



	40ft(HQ)	20ft
Number of modules per container	620	124
Number of modules per pallet	31	31
Number of pallets per container	20	4
Packaging box dimensions (LxWxH) in mm	2395×1120×1235	2395×1120×1235
Box gross weight[kg]	945	945

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2022 Risen Energy. All rights reserved. Contents included in this datasheet are subject to change without notice.

No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.

THE POWER OF RISING VALUE

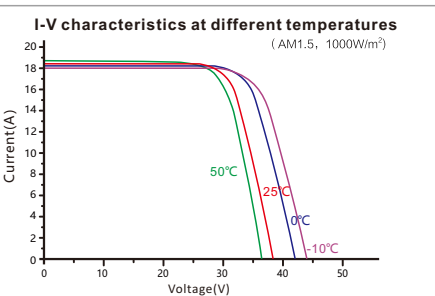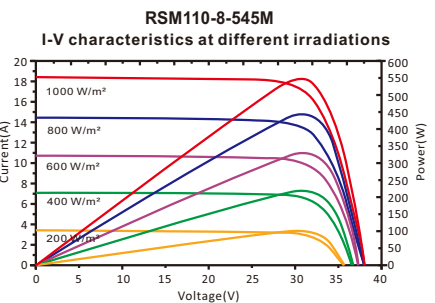

Our Partners: