

RSM150-8-490-510M₁



Celdas

150



Eficiencia

Hasta 20,8 %



Dimensiones del módulo

2220 X 1102 X 35 mm



Características del módulo

Marco de aluminio
anonizado



Packaging

31 módulos por pallet,
620 módulos por 40'HC



Tecnología

P-Type



Garantía del producto

12 años de garantía




Garantía del rendimiento

25 años de garantía



HIGH PERFORMANCE MONOCRYSTALLINE PERC MODULE

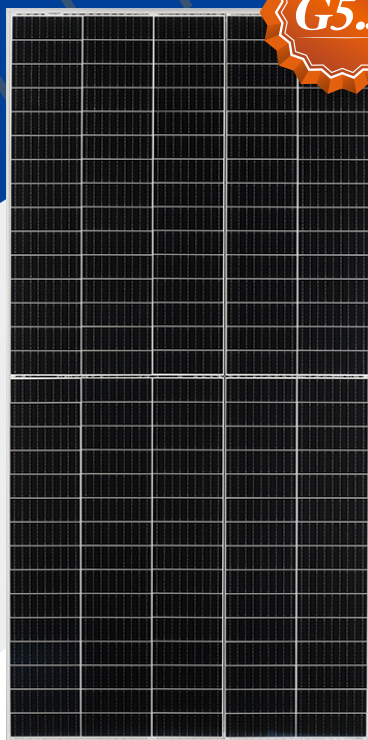

RSM150-8-485M-510M

150 CELL Mono PERC Module	485-510Wp Power Output Range
1500VDC Maximum System Voltage	20.8% Maximum Efficiency

KEY SALIENT FEATURES

- Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing
- Industry leading lowest thermal co-efficient of power
- Industry leading 12 years product warranty
- Excellent low irradiance performance
- Excellent PID resistance
- Positive tight power tolerance
- Dual stage 100% EL Inspection warranting defect-free product
- Module Imp binning radically reduces string mismatch losses
- Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
- Comprehensive product and system certification
 - ◆ IEC61215:2016; IEC61730-1/-2:2016;
 - ◆ ISO 9001:2015 Quality Management System
 - ◆ ISO 14001:2015 Environmental Management System
 - ◆ ISO 45001:2018 Occupational Health and Safety Management System



* As there are different certification requirements in different markets, please contact your local Risen Energy sales representative for the specific certificates applicable to the products in the region in which the products are to be used.


RISEN ENERGY CO., LTD.

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.

Tashan Industry Zone, Meilin, Ninghai 315609, Ningbo | PRC
Tel: +86-574-59953239 Fax: +86-574-59953599
E-mail: marketing@risenenergy.com Website: www.risenenergy.com

LINEAR PERFORMANCE WARRANTY


12 year Product Warranty / 25 year Linear Power Warranty

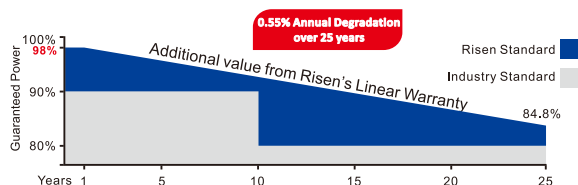

* Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd



Dimensions of PV Module Unit: mm

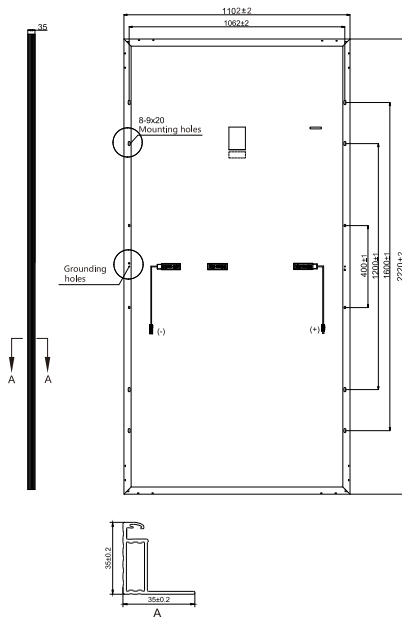

ELECTRICAL DATA (STC)

Model Number	RSM150-8-485M	RSM150-8-490M	RSM150-8-495M	RSM150-8-500M	RSM150-8-505M	RSM150-8-510M
Rated Power in Watts-Pmax(Wp)	485	490	495	500	505	510
Open Circuit Voltage-Voc(V)	50.35	50.57	50.79	51.01	51.23	51.45
Short Circuit Current-Isc(A)	12.25	12.32	12.39	12.46	12.53	12.60
Maximum Power Voltage-Vmpp(V)	42.22	42.44	42.66	42.88	43.10	43.32
Maximum Power Current-Impp(A)	11.50	11.56	11.62	11.68	11.74	11.80
Module Efficiency (%) *	19.8	20.0	20.2	20.4	20.6	20.8

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

* Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

Model Number	RSM150-8-485M	RSM150-8-490M	RSM150-8-495M	RSM150-8-500M	RSM150-8-505M	RSM150-8-510M
Maximum Power-Pmax (Wp)	367.7	371.5	375.4	379.3	383.2	387.1
Open Circuit Voltage-Voc (V)	46.83	47.03	47.23	47.44	47.64	47.85
Short Circuit Current-Isc (A)	10.05	10.10	10.16	10.22	10.27	10.33
Maximum Power Voltage-Vmpp (V)	39.18	39.38	39.59	39.79	40.00	40.20
Maximum Power Current-Impp (A)	9.38	9.43	9.48	9.53	9.58	9.63

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline
Cell configuration	150 cells (5×15+5×15)
Module dimensions	2220×1102×35mm
Weight	27±1kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6005-2T6, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+)/350mm, Negative(-)/350mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.34%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	20A



PACKAGING CONFIGURATION

	40ft(HQ)	20ft
Number of modules per container	620	155
Number of modules per pallet	31	31
Number of pallets per container	20	5
Packaging box dimensions (LxWxH) in mm	2250×1130×1235	2250×1130×1235
Box gross weight[kg]	870	870

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2021 Risen Energy. All rights reserved. Contents included in this datasheet are subject to change without notice. No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.

THE POWER OF RISING VALUE

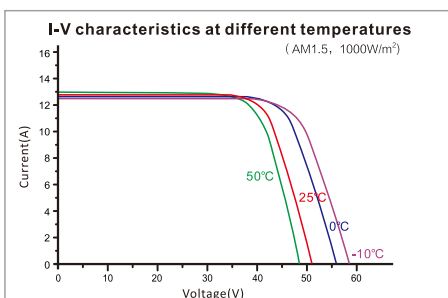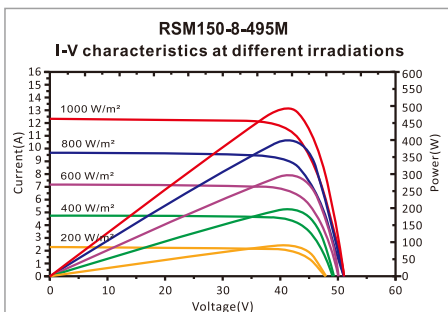

Our Partners: