




# HiHero

**Bifacial N-type Heterojunction Technology**

**620 W ~ 645 W**

**CS6.2-66HB-620 | 625 | 630 | 635 | 640 | 645**

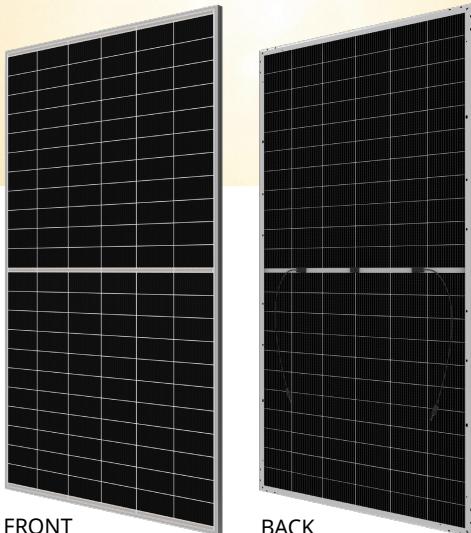

## MORE POWER



Module power up to 645 W  
Module efficiency up to 23.9 %



Up to 90% Power Bifaciality,  
more power from the back side



No B-O LID, excellent anti-LeTID & anti-PID  
performance. Low power degradation,  
high energy yield



Leading temperature coefficient (Pmax): -0.24%/°C,  
increases energy yield in hot climate



Better shading tolerance

**15  
Years**

**Industry Leading Product Warranty on  
Materials and Workmanship\***

**30  
Years**

**Linear Power Performance Warranty\***

**1<sup>st</sup> year power degradation no more than 1%  
Subsequent annual power degradation no more than 0.35%**

\*According to the applicable Canadian Solar Limited Warranty Statement.

## MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001: 2015 / Quality management system

ISO 14001: 2015 / Standards for environmental management system

ISO 45001: 2018 / International standards for occupational health & safety

IEC 62941: 2019 / Photovoltaic module manufacturing quality system

## PRODUCT CERTIFICATES\*

## MORE RELIABLE



Tested up to ice ball of 35 mm diameter  
according to IEC 61215 standard



Minimizes micro-crack impacts




Heavy snow load up to 5400 Pa,  
enhanced wind load up to 2400 Pa\*

\* The specific certificates applicable to different module types and markets will vary,  
and therefore not all of the certifications listed herein will simultaneously apply to the  
products you order or use. Please contact your local Canadian Solar sales representative  
to confirm the specific certificates available for your Product and applicable in the regions  
in which the products will be used.



**CSI Solar Co., Ltd.** is committed to providing high quality solar  
photovoltaic modules, solar energy and battery storage solu-  
tions to customers. The company was recognized as the No. 1  
module supplier for quality and performance/price ratio in the  
IHS Module Customer Insight Survey. Over the past 23 years,  
it has successfully delivered over 150 GW of premium-quality  
solar modules across the world.

\* For detailed information, please refer to the Installation Manual.

## Rear View

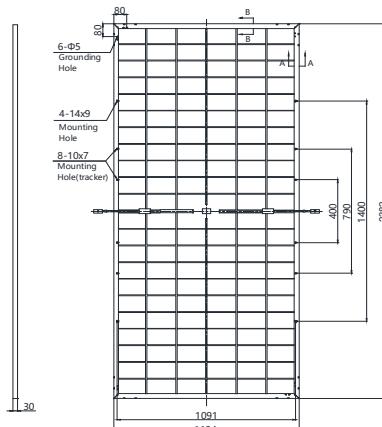

## Frame Cross Section

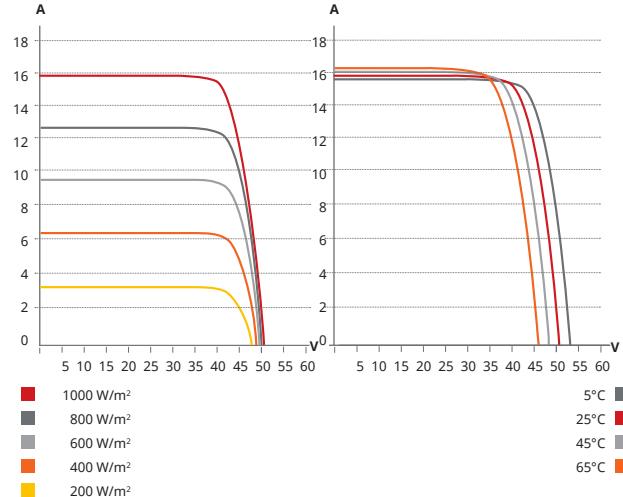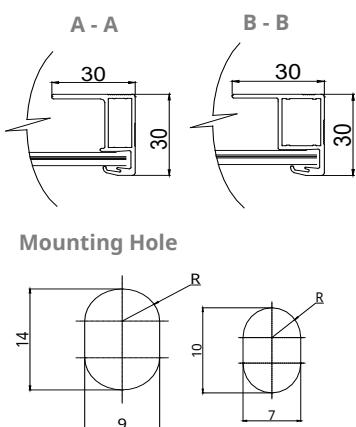

## ELECTRICAL DATA | STC\*

	Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)	Module Efficiency	
CS6.2-66HB-620	620 W	42.6 V	14.58 A	50.1 V	15.65 A	23.0%	
Bifacial Gain**	5%	651 W	42.6 V	15.31 A	50.1 V	16.43 A	24.1%
	10%	682 W	42.6 V	16.04 A	50.1 V	17.22 A	25.2%
	20%	744 W	42.6 V	17.50 A	50.1 V	18.78 A	27.5%
CS6.2-66HB-625	625 W	42.6 V	14.69 A	50.1 V	15.75 A	23.1%	
Bifacial Gain**	5%	656 W	42.6 V	15.42 A	50.1 V	16.54 A	24.3%
	10%	688 W	42.6 V	16.16 A	50.1 V	17.33 A	25.5%
	20%	750 W	42.6 V	17.63 A	50.1 V	18.90 A	27.8%
CS6.2-66HB-630	630 W	42.6 V	14.79 A	50.2 V	15.82 A	23.3%	
Bifacial Gain**	5%	662 W	42.6 V	15.53 A	50.2 V	16.61 A	24.5%
	10%	693 W	42.6 V	16.27 A	50.2 V	17.40 A	25.7%
	20%	756 W	42.6 V	17.75 A	50.2 V	18.98 A	28.0%
CS6.2-66HB-635	635 W	42.7 V	14.88 A	50.3 V	15.92 A	23.5%	
Bifacial Gain**	5%	667 W	42.7 V	15.62 A	50.3 V	16.72 A	24.7%
	10%	699 W	42.7 V	16.37 A	50.3 V	17.51 A	25.9%
	20%	762 W	42.7 V	17.86 A	50.3 V	19.10 A	28.2%
CS6.2-66HB-640	640 W	42.7 V	14.99 A	50.4 V	16.01 A	23.7%	
Bifacial Gain**	5%	672 W	42.7 V	15.74 A	50.4 V	16.81 A	24.9%
	10%	704 W	42.7 V	16.49 A	50.4 V	17.61 A	26.1%
	20%	768 W	42.7 V	17.99 A	50.4 V	19.21 A	28.4%
CS6.2-66HB-645	645 W	42.8 V	15.07 A	50.4 V	16.13 A	23.9%	
Bifacial Gain**	5%	677 W	42.8 V	15.82 A	50.4 V	16.94 A	25.1%
	10%	710 W	42.8 V	16.58 A	50.4 V	17.74 A	26.3%
	20%	774 W	42.8 V	18.08 A	50.4 V	19.36 A	28.7%

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

\*\* Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

## ELECTRICAL DATA | NMOT\*

	Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)
CS6.2-66HB-620	473 W	40.6 V	11.65 A	47.6 V	12.62 A
CS6.2-66HB-625	477 W	40.6 V	11.74 A	47.6 V	12.70 A
CS6.2-66HB-630	481 W	40.6 V	11.83 A	47.7 V	12.76 A
CS6.2-66HB-635	484 W	40.7 V	11.90 A	47.8 V	12.84 A
CS6.2-66HB-640	488 W	40.7 V	11.99 A	47.9 V	12.91 A
CS6.2-66HB-645	492 W	40.8 V	12.06 A	47.9 V	13.01 A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m² spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## MECHANICAL DATA

Specification	Data
Cell Type	HJT cells
Cell Arrangement	132 [2 x (11 x 6)]
Dimensions	2382 x 1134 x 30 mm (93.8 x 44.6 x 1.18 in)
Weight	32.8 kg (72.3 lbs)
Front Glass	2.0 mm heat strengthened glass with anti-reflective coating
Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4.0 mm² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	300 mm (11.8 in) (+) / 200 mm (7.9 in) (-) or customized length*
Connector	T6 or MC4-EVO2 or MC4-EVO2A
Per Pallet	36 pieces
Per Container (40' HQ)	720 pieces

\* For detailed information, please contact your local Canadian Solar sales and technical representatives.

## ELECTRICAL DATA

Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1500 V (IEC/UL)
Module Fire Performance	TYPE 29 (UL 61730) or CLASS C (IEC61730)
Max. Series Fuse Rating	35 A
Protection Class	Class II
Power Tolerance	0 ~ + 10 W
Power Bifaciality*	85 %

\* Power Bifaciality =  $P_{max\_rear} / P_{max\_front}$ , both  $P_{max\_rear}$  and  $P_{max\_front}$  are tested under STC, Bifaciality Tolerance:  $\pm 5\%$

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.24 % / °C
Temperature Coefficient (Voc)	-0.23 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	41 ± 3°C

## PARTNER SECTION

